


Pneumatic stripping machine

AM STRIP 015

Benchtop pneumatic stripping machine for wires from 0,15 to 4 mm²

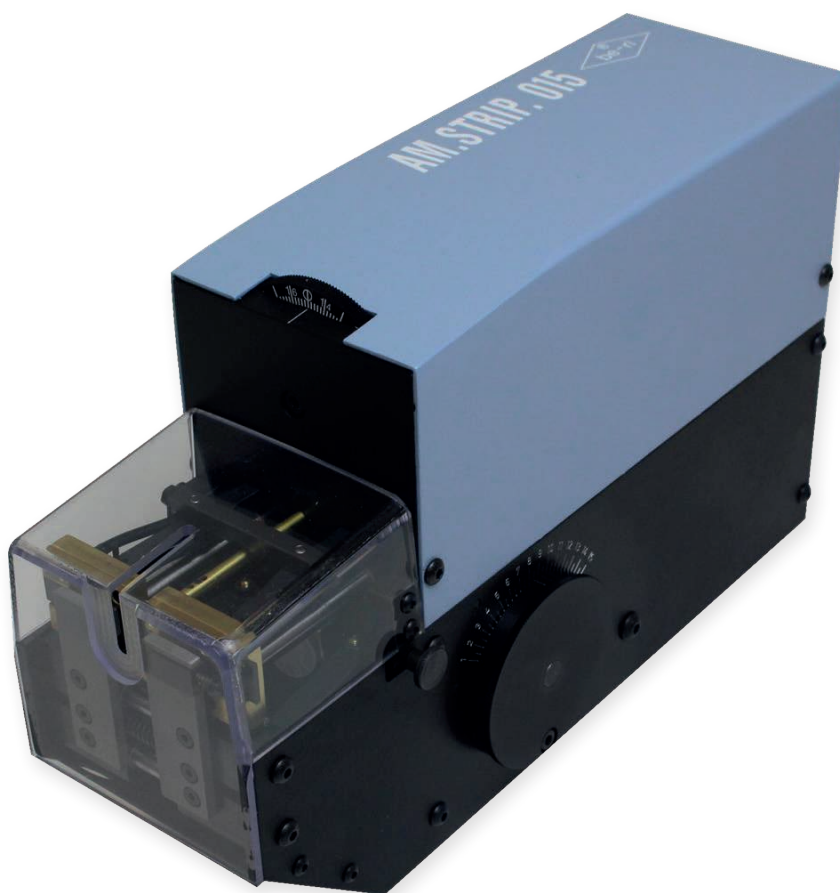

FEATURES

- Universal pneumatic stripping unit for small and medium-sized production runs
- The V-shaped blades allow for optimal processing of all standard wires on the market
- Special flat can be mounted quickly and without tools for processing difficult insulations such as Teflon, silicone, neoprene, etc
- Short distance (9 mm) from cover to blade
- Air jet for waste removal
- Activation via pneumatic sensor
- Self-centering clamps with self-adjusting closing pressure

TECHNICAL SPECIFICATIONS

	AM STRIP 015
Wire diameter	max 5 mm
Cross section	min 0,15 - max 4 mm ²
Flat cable width	max 8 mm
Total stripping length	da 1,5 mm a 15,0 mm
Partial stripping length	da 1,0 mm a 15,0 mm
Air supply	3 – 6 bar
Cycle time	approx. 0,5 s
Dimensions & Weight	95 x 280 x 165 mm / 3,5 kg

CE Conformity: AM STRIP 015 is fully compliant with CE regulations and EMC equipment guidelines for mechanical, electrical and electromagnetic compatibility.

Note: we recommend to send samples with the application requirements for a preliminary examination.

