


Prefeeder

LF 40D

Motorized prefeeder for reels up to 40 kg

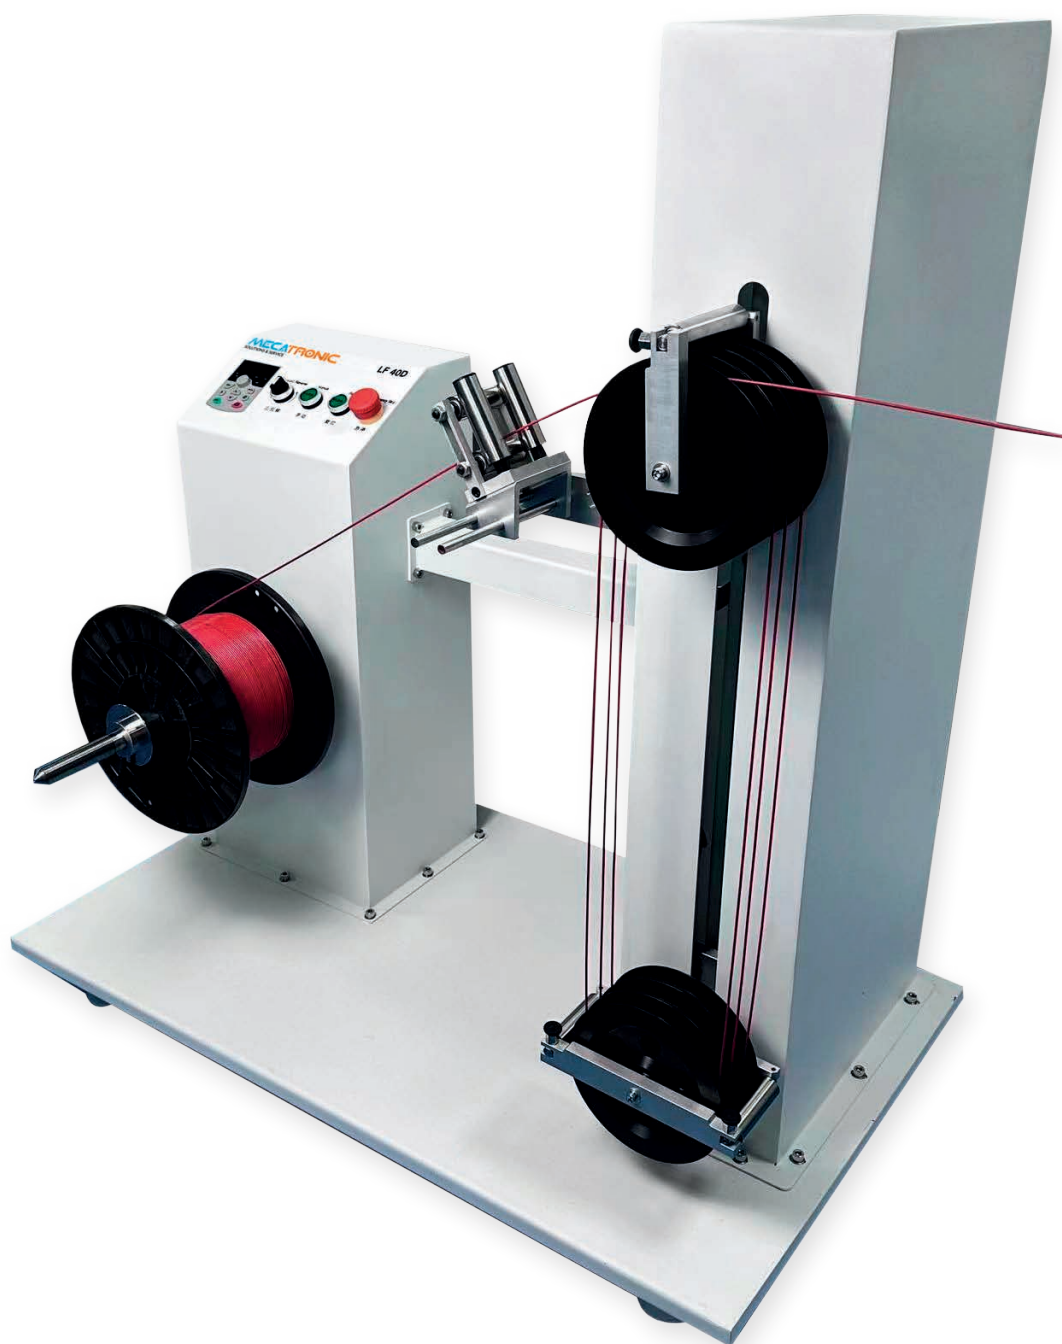

Technical specifications are subject to change according to possible needs and without notice.

FEATURES

- Equipped with a movable pulley that allows for controlled and constant feed flow.
- Front loading for tool-free reel changes.
- Simple and intuitive controls.
- Speed suitable for working in line with most commercial cutting and stripping machines.
- The large 3.8 m storage capacity allows for high-speed applications.
- Adjustable cable guide.

OPTIONS

- Support for hanks

TECHNICAL SPECIFICATIONS

	LF 40D
Cable diameter	max 15 mm
Cable reel diameter	max 730 mm
Reel center diameter	25 - 80 mm
Reel weight	max 40 Kg
Cable reel width	max 300 mm
Shaft length	400 mm
Power supply	100 - 220 VAC 50-60 Hz
Feed rate	0 - 2,0 m/s
Dimensions & Weight	1130 x 766 x 1148 mm / 65 Kg

CE Conformity: LF 40D is fully compliant with CE regulations and EMC equipment guidelines for mechanical, electrical and electromagnetic compatibility.

Note: we recommend to send samples with the application requirements for a preliminary examination.

