

Crimping presses

SERIES UP 35

Pneumatic bench presses for loose terminals

WEZAG[®]



FEATURES

- Pneumatic bench press for crimping insulated terminals (up to 10 mm²), uninsulated terminals (up to 16 mm²), wire end ferrules (up to 50 mm²)
- Precision and safety due to the and linear working mechanism
- Automatic opening at the end of the crimping cycle
- Piece counter
- LED light illumination
- Cycle start foot pedal
- Easy exchange of adapters without tools
- Special applications on request

VERSIONS


- **UP 35**
Standard version. Linear working mechanism
- **UP 35 BA**
Linear working mechanism. With integrated contact holding system operated manually by hand lever
- **UP 35 SSC**
Linear working mechanism. Can be operated without finger guard and with double foot pedal

TECHNICAL SPECIFICATIONS

	Series UP 35
Crimping force	25 KN
Air supply	max 6 bar
Dimensions	385 x 180 x 480 mm
Weight	20 kg

CE Conformity: UP 35 series is fully compliant with CE regulations and EMC equipment guidelines for mechanical, electrical and electromagnetic compatibility.

Note: we recommend to send samples with the application requirements for a preliminary examination.

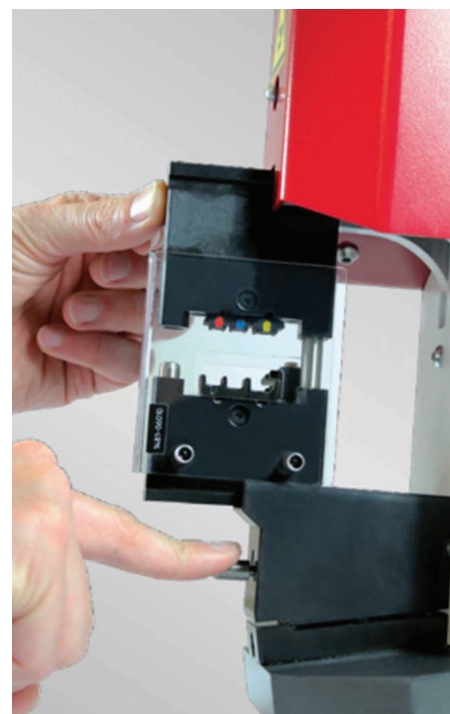

Easy exchange of adapters